
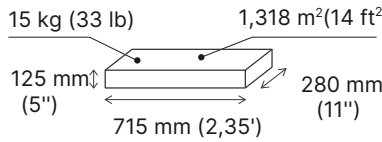

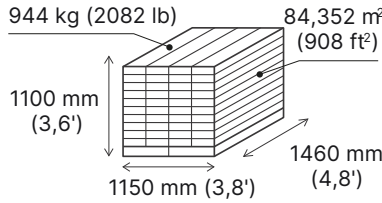





HARDWOOD FLOORING

Notes:		Pattern: Chevron 	Color: Natural Unfinished										
PRODUCT INFO		PACKAGING	STRUCTURE										
Species	White European Oak	BOX 	2-layer Engineered Construction* 										
Finish	Unfinished												
Structure	Engineered (2-layer)												
Joint	T&G												
Bevel	Micro (0,5 mm)												
Surface	Sanded (120 grit)	PALLET 	*High Balance and Stability ** Saw Cut White European Oak *** Water resistant plywood										
Grade	Select												
DIMENSIONS													
Thickness	15 mm (5/8")												
Width	90 mm (3,55")												
Length	610 mm (2')												
Angle	45												
FINISH		DESCRIPTION											
Sheen \ Gloss	n/a	<table border="1"> <tr> <td>natural wood</td> <td>rare knots</td> </tr> <tr> <td>even texture</td> <td>perfect look</td> </tr> <tr> <td>uniform</td> <td>slight color variation</td> </tr> <tr> <td>clean planks</td> <td>minimal sapwood</td> </tr> <tr> <td>smooth surface</td> <td>selected grain</td> </tr> </table>		natural wood	rare knots	even texture	perfect look	uniform	slight color variation	clean planks	minimal sapwood	smooth surface	selected grain
natural wood	rare knots												
even texture	perfect look												
uniform	slight color variation												
clean planks	minimal sapwood												
smooth surface	selected grain												
Look	Smooth	Product clean look is created by minimalistic natural wood color variation, occasional small knots up to 10mm, as well as rare light sapwood. 											
Feeling	Transfer warmth of natural wood												
Type	Unfinished												
Wear resistance	n/a												
Scratch resistance	n/a												
Slip resistance	n/a												
Resistance to chemical agents	n/a												
Maintenance	n/a												
Repairability	Easy												
TECHNICAL INFORMATION													
Characteristics (EN 14342)		Deviations (EN 13489)											
Formaldehyde emission class	E1; ULEF	Deviation on Thickness	0,2 mm										
Pentachlorophenol content	None	Deviation on Width	0,2 mm										
Thermal resistance	0,118 m ² K/W	Height Difference	0,2 mm										
Thermal conductivity	0,161 W/(m K)	Cup	<0,2% of width										
Fire resistance	Dfl-s1	Bow	<0,5% of length										
		Spring	<0,1% of length										
INSTALLATION		STORAGE & USE											
 <p>Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level. Suitable for underfloor heating.</p>		 <p>Air Humidity 40-65% Temperature +18°C ... +22°C (64°F ... 72°F)</p>											
CARE & MAINTENANCE		DESCRIPTIONS & IMAGERY											
<p>Maintenance of hardwood floors depends on the applied finish. Flooring assumes daily cleaning from dust and grit using a vacuum, followed by a thorough cleaning with floor cleaner. Floor surface areas that receive the most traffic and get worn down quicker, such as areas by the front door, hallways, kitchens etc. should be periodically renewed.</p>		<p>Flooring colors displayed in digital platforms may vary according to the color settings of the monitor you are using.</p>											